

PREMIUM NOISE REDUCTION STAGE 2


DOOR SOLUTION includes a competition grade selection of materials:

- **S2-BASEMAT – 2.5 mm Alubutyl Mat**
Effective and easy-to-install sound deadening material. Excellent adhesion, flexible structure – no preheating required. Efficiently reduces resonance. Ideal for vehicles and other soundproofing applications.
- **S2-SOFTFLEX7 – Noise Absorbing Material**
Effective material for reducing reflected sound. Suitable for acoustic treatment and internal lining of enclosures. Flexible and easy to install – enhances sound quality.
- **S2-TOPFLEX6 – Closed-cell Foam**
Durable, flexible, and easy-to-shape insulation material. Water repellent with excellent thermal and sound insulation properties. Suitable for humid environments.

Basic rules for installation:

- Thoroughly prepare the surface for treatment: remove standard sound insulation materials, degrease the surface.
- The materials for DOOR SOLUTION do not require additional heating. Installation should be proceeded at an ambient temperature at least +10°C / 50 °F
- The materials should be pressed with a roller to the corresponding areas of the car body thoroughly, preventing air bubbles formation.

	Products	Thickness, mm/inches	Sheet size, mm/inches	Sheets in package	m ² /Sq. Ft. per package	Weight per package kg/lb
1	S2-BaseMat	2.5mm 0.09"	370 x 500mm 14.6" x 19.7"	8	1.48/ 15.93	7.4/ 16.3
2	S2-SoftFlex7	7.0mm 0.28"		4	0.74/ 7.94	
3	S2 TopFlex6	6.0mm 0.24"		2	0.37/ 3.98	

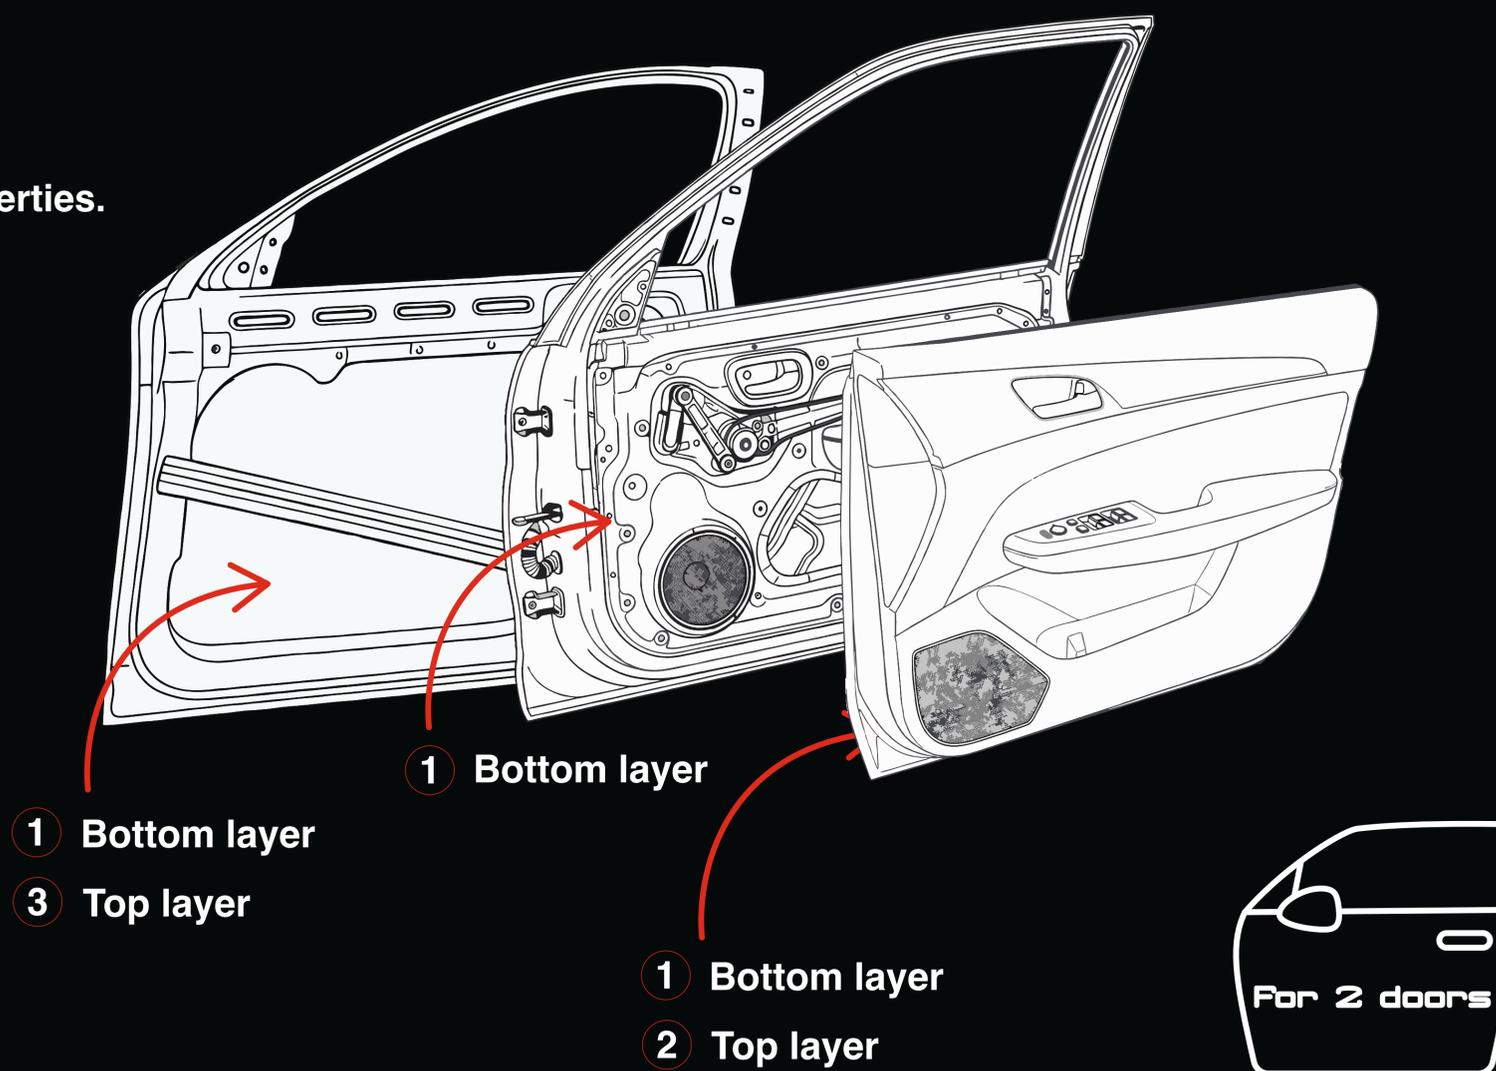

SCAN ME:

