




Front View




Left View




Right View





Rear View

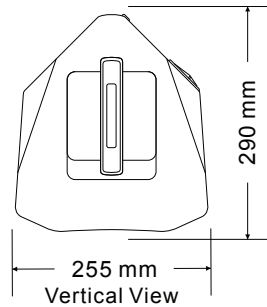

255 mm
Vertical View



Bottom View
35mm Mounting Hole

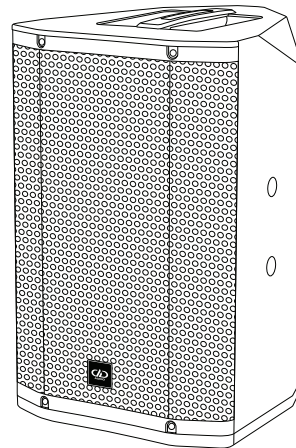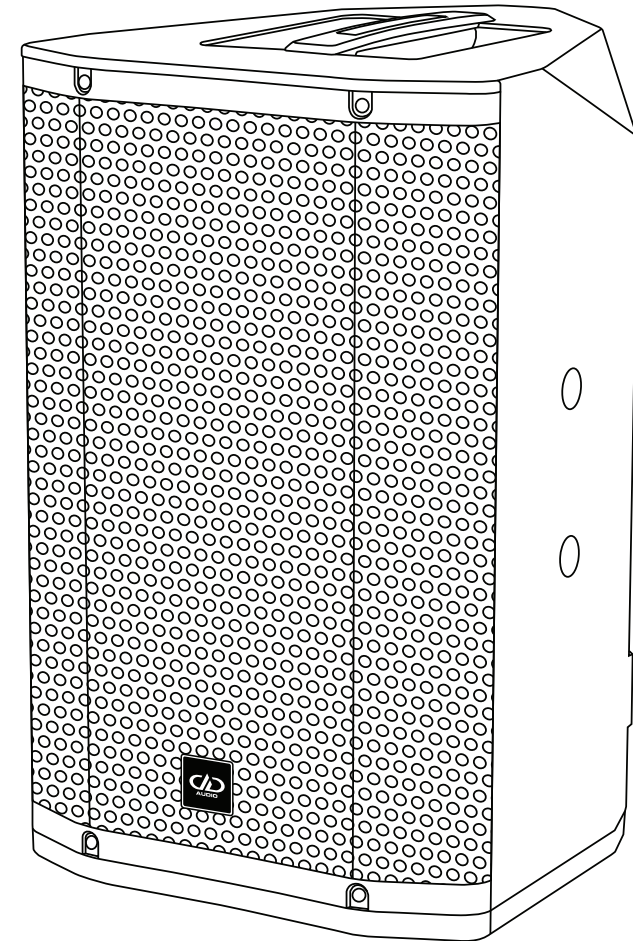

Model No.	RAGER-PRO-851
Type	PA System All-in-One Battery Powered
Transducer LF	8" woofer ferrite magnet
Transducer MF	5" mid-driver ferrite magnet
Transducer HF	1" dome neo tweeter
Frequency Response (-6dB)	55 Hz - 18 kHz
Max. SPL (1m, free space)	114 dB
Impedance	4 Ohms
Amplification	Class-D 3-way Amp
Power Output (RMS)	200W (LF120W + MF 60W + HF 20W)
Number of Mixer Channels	3 Channels
EQ	3-Band Channel EQ
Effects	Echo / Repeat / Delay
Inputs	3 * XLR / Jack Combo input, 1 * Aux line input
Outpast	1*XLR line out
Bluetooth	Yes, and support TWS function
Enclosure Material	Polypropylene Plastic
Mounting Options	35mm pole mount, Tilt-back, Floor Monitor
Power Supply	100~260V 60/50HZ
Battery	Rechargeable Lithium-ion battery 24V 4400mAh

RAGER-PRO-851

U S E R M A N U A L